



VALVOLA A FARFALLA WAFER WAFER BUTTERFLY VALVE

ZIGGIOTTO

ART.S94_DN80

VALVOLA A FARFALLA WAFER PN10/16


WAFER BUTTERFLY VALVE PN10/16

APPLICAZIONE:

Impianti idrici, riscaldamento, condizionamento e antincendio.

APPLICATION:

Water systems, heating, conditioning and fire prevention.

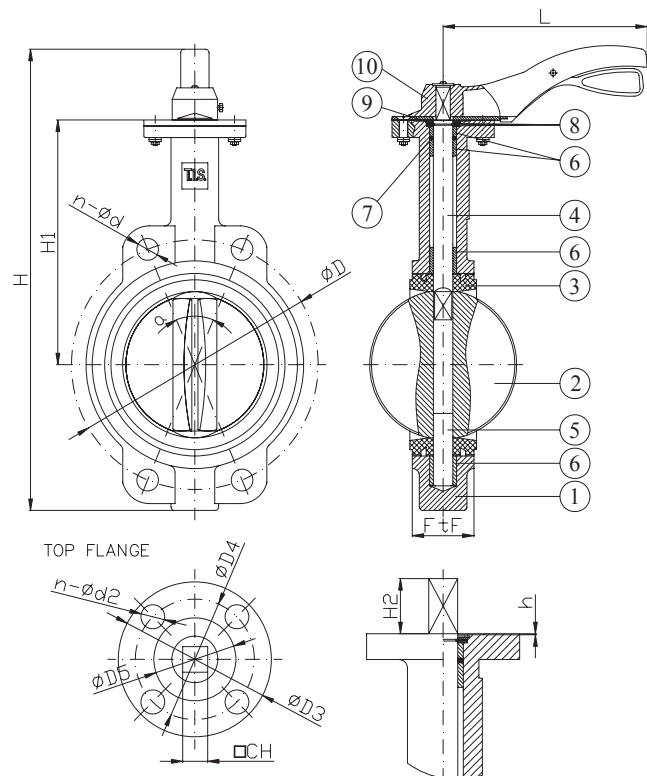

NORMA PROGETTO: EN 593
SCARTAMENTO: EN 558-1 Serie20
FLANGE: EN 1092-2
COLLAUDI: EN 12266
FLANGIA SUPERIORE: ISO 5211
TEMPERATURA ES: EPDM -10°C+120°C NBR-10°C+80°C
DESIGN STANDARD: EN 593
FACE TO FACE: EN 558-1 Serie20
FLANGES: EN 1092-2
TESTS: EN 12266
TOP FLANGE: ISO 5211
WORKING TEMP: EPDM -10°C+120°C NBR-10°C+80°C

DENOMINAZIONE PART

MATERIALI MATERIALS

		D104	D106
1	CORPO BODY	GJL 250 GJL 250	GJS 400 GJS 400
2	DISCO DISC	GJS 400 GJS 400	INOX AISI 304 SS AISI 304
3	TENUTA SEAT	NBR o EPDM NBR or EPDM	
4	ALBERO STEM	ACCIAIO INOX AISI 420 SS AISI 420	
5	ALBERO INF. LOWER STEM	ACCIAIO INOX AISI 420 SS AISI 420	
6	BOCCOLA BUSHING	PTFE PTFE	
7	O-RING O-RING	NBR NBR	
8	RONDELLA WASHER	ACCIAIO INOX AISI 304 SS AISI 304	
9	SIEGER SIEGER	ACCIAIO STEEL	
10	LEVA LEVER	ALLUMINIO ALUMINIUM	

RIVESTIMENTO ESTERNO/INTERNO: Polvere epossidica di colore BLU RAL 5012 con spessore min 150µm.
SURFACE PROTECTION: FBE coating process with epoxy resin powder of sky blue color RAL 5012 and minimum thickness of 150µm.

DN	øD	n-ød	øD3	øD4	øD5	h	n-ød2	CHxCH	H	H1	H2	a1	a2	L	FtF	Peso(kg) Weight
80	160	4-ø19	65	50	35	2	4-ø7	11x11	265	181	32	45°	90°	170	46	4



VALVOLE A FARFALLA

ZIGGIOTTO

DIAGRAMMI PERDITA DI CARICO HEADLOSS DIAGRAMS

