



# VALVOLA A FARFALLA CON RIDUTTORE E SWICH

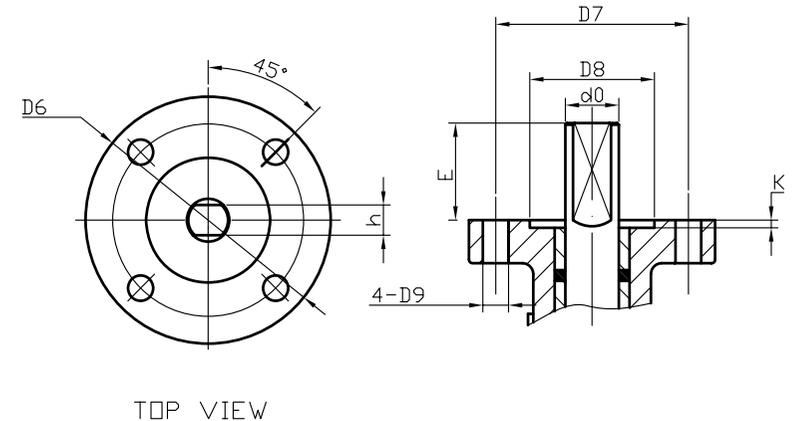

## ZIGGIOTTO

### Articolo S96

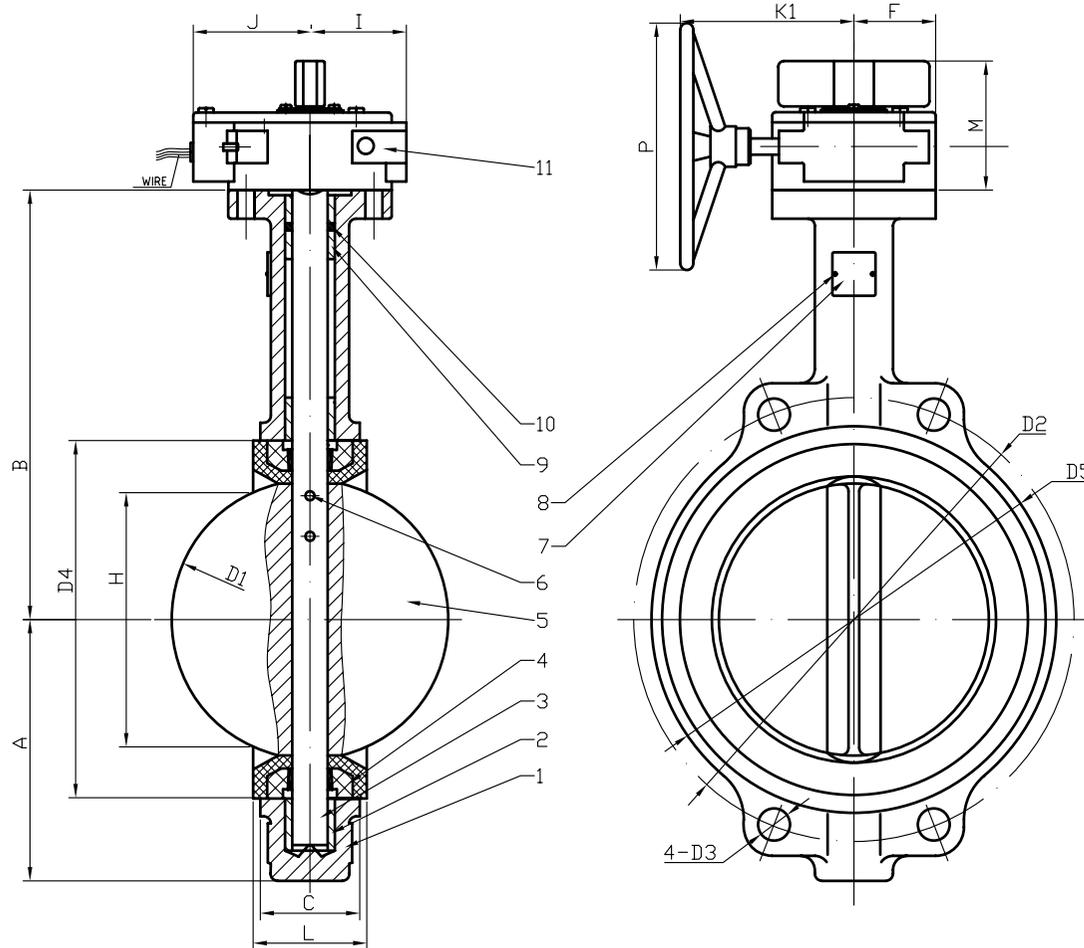

TOP VIEW

**NOTE:**

1. TOPWORKS' DIMENSIONS CONFORM TO ISO 5211.
2. MOUNTING FLANGES' DIMENSIONS CONFORM TO DIN2501 PN16.

GEAR BOX DATA							
VALVE SIZE	RATIO	P	F	K1	I	J	M
2"~6"	24:1	150	54	151	74	89	113
8",10"	30:1	300	77	238	87	90	123
12"	50:1	300	83	227	82	116	124

FEATURES		
WORKING PRESSURE	1.6MPa	
TEST PRESSURE	SHELL	2.4MPa
	SEAT	1.76MPa
WORKING TEMP.	EPDM	-30°C TO 110°C

11	1	GEAR BOX
10	1	"O" RING,NBR ASTM D2000
9	2	SHORT BUSHING, LUBRICATED BRONZE
8	2	PLATE RIVET,ALUMINUM
7	1	NAME PLATE,ALUMINUM
6	2	TAPER PINS,ASTM A582 S41600
5	1	DISC,ASTM A351 CF8
4	1	SEAT,EPDM,ASTM D2000
3	1	SHAFT,ASTM A582 S41600
2	2	LONG BUSHING, LUBRICATED BRONZE
1	1	BODY,ASTM A126 CL.B

SIZE	D1	D2	N	D3	D4	D5	D6	D7	D8	K	D9	d0	h	A	B	C	E	H	L
DN50(2")	52.88	125	4	18	76.30	100	77	50	35	4	7	12.6	8.86	80	161	42.04	32	32.30	45.00
DN65(2 1/2")	64.49	145	4	18	89.00	120	77	50	35	4	7	12.6	8.86	89	175	44.68	32	46.10	47.60
DN80(3")	78.84	160	8	18	103.90	127	77	50	35	4	7	12.6	8.86	95	181	45.21	32	64.40	49.00
DN100(4")	104.04	180	8	18	135.00	156	92	70	55	4	10	15.77	11.10	114	200	52.07	32	86.30	54.70
DN125(5")	123.32	210	8	18	159.00	190	92	70	55	4	10	18.92	12.70	127	213	54.36	32	110.60	58.00
DN150(6")	155.58	240	8	22	188.40	212	92	70	55	4	10	18.92	12.70	139	226	55.75	32	134.80	58.60
DN200(8")	202.46	295	12	22	238.12	268	125	102	70	4	12	22.1	15.88	175	260	60.58	45	192.40	63.40
DN250(10")	250.47	355	12	26	292.35	325	125	102	70	4	12	28.45	20.62	203	292	65.63	45	241.70	70.00
DN300(12")	301.55	410	12	26	344.09	402	150	125	85	4	14	31.6	22.10	242	337	76.90	45	291.80	80.10

